




Thank you for choosing The3DPC!

Velka 3 ARGB Front panel Extension

Tools needed: M3 Allen wrench and Phillips screwdriver

- 1) Begin by removing the front and the motherboard side panel from the case.
- 2) Take the front panel and remove the upper and lower mounting brackets by removing six M3 x 4mm button head screws.

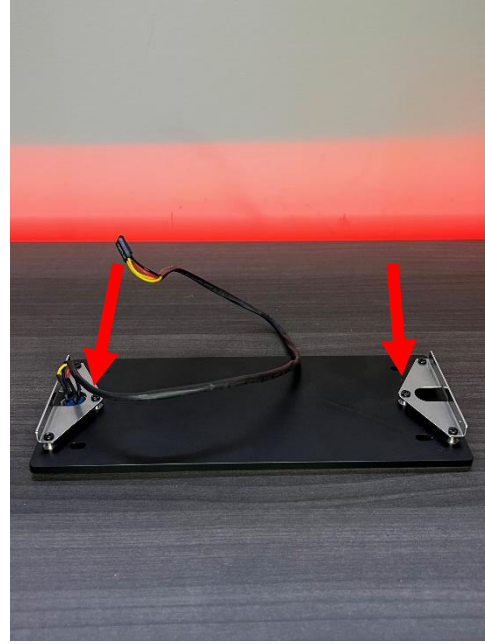

- 3) Mount the RGB Panel extension to the back of the aluminum front panel as shown.
- 4) Next, attach the front panel mounting brackets using the included six M3 x 20mm button head screws. **DO NOT OVER TIGHTEN!**



5) Route the front panel power button cables to the motherboard along with the ARGB 5v header. (See your motherboard's manual)

6) Install the side panel and front panel per the Velkase assembly manual. *Use your favorite RGB software and enjoy your new front panel. ***There are 27 LEDs on the panel.***

